

A WIDE MATERIAL HANDLING TIRE

IDEAL FOR REGULAR WORKING CONDITIONS

A universal solid tire that consistently delivers assured performance. It is one of the widest tires in the industry. The wide-tread and flat crown radius is designed for maximum tire life. The deep lugs of GLOBESTAR WT serve to give the best traction with high stability in normal working environments. The wide-tread also prevents tire distortion while cornering. GLOBESTAR WT is built with natural-rubber compounds that ensure good resilience and high tensile strength.

KEY FEATURES

- Contemporary tread design with wide shoulders provide durability and even wear.
- A three-stage tire with a centre core that provides a soft ride and reduces driver fatigue.
- Excellent traction and optimum distribution of load to ensure stability and torque.
- Runs with reduced heat build-up and energy efficient lower rolling resistance.




Wide
tread width

High
stability

Longer
tire life

Better
traction

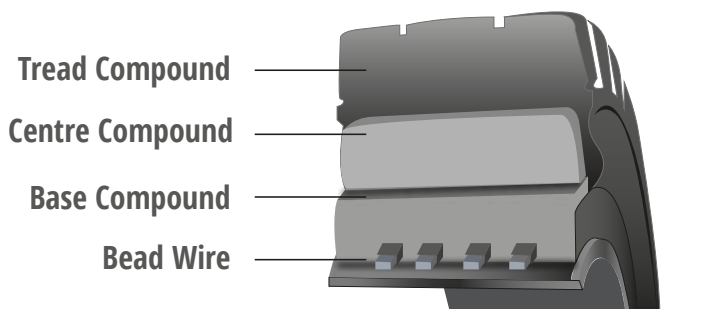

With better handling, stable cornering and a highly functional design, GLOBESTAR WT is ideal for electric and internal combustion engine forklifts operating in regular material handling applications. GLOBESTAR WT tires are also reinforced with creel bead wires to ensure secure wheel and rim fitment.

GLOBESTAR WT



TECHNICAL DATA

Tire Size	Rim Size	Clip on	Profile	Tire dimensions		Tire dimensions		Tread Width	Other Vehicles load capacity (Kg)		Tire load capacity on forklifts at Max. Speed				
				Max width ±1% (mm)	OD ± 2% (mm)	Max width ±1% (inch)	OD ± 2% (Inch)		6 Km/h	10 Km/h	16 Miles/h (Lbs)		25 Km/h (Kg)		
											Load wheel	Steer wheel	Load wheel	Steer wheel	
4.00-4	2.10 -4		GS-WT	99	304	4	12	86	535	485	1180	910	535	412	
4.00-4	2.50 C-4		GS-WT	99	304	4	12	86	535	485	1180	910	535	412	
4.00-8	3.00 D-8		GS-WT	104	403	4	16	96	950	860	2095	1610	950	730	
5.00-8	3.00 D-8	•	GS-WT	116	444	5	17	106	1415	1285	3120	2405	1415	1090	
15x4 1/2-8	125/75-8	3.00 D-8	•	GS-WT	115	374	5	15	106	1040	945	2295	1765	1040	800
16x6-8	150/75-8	4.33 R-8	•	GS-WT	139	406	5	16	135	1495	1360	3210	2535	1495	1150
18x7-8	180/70-8	4.33 R-8	•	GS-WT	152	451	6	18	146	2145	1945	4730	3640	2145	1650
140/55-9		4.00 E-9	•	GS-WT	129	377	5	15	112	1170	1060	2580	1986	1170	900
6.00-9		4.00 E-9	•	GS-WT	139	517	5	20	130	1885	1710	4155	3195	1885	1450
21x8-9	200/75-9	6.00 E-9	•	GS-WT	179	514	7	20	168	2755	2505	6075	4675	2755	2120
6.50-10		5.00 F-10	•	GS-WT	156	563	6	22	142	2340	2125	5160	3970	2340	1800
200/50-10		6.50 F-10	•	GS-WT	191	455	8	18	170	2470	2240	5445	4190	2470	1900
23x9-10	225/75-10	6.50 F-10	•	GS-WT	197	580	8	23	190	3445	3125	7595	5840	3445	2650
7.00-12		5.00 S-12	•	GS-WT	167	645	7	25	155	2920	2645	6435	4940	2920	2240
23x10-12	250/60-12	8.00 G-12	•	GS-WT	234	580	9	23	218	3770	3420	8310	6390	3770	2900
27x10-12	250/75-12	8.00 G-12	•	GS-WT	243	670	10	26	212	3900	3540	8600	6615	3900	3000
7.00-15		5.50-15	•	GS-WT	175	704	7	28	166	3545	3215	7815	6005	3545	2725
7.00-15		6.00-15	•	GS-WT	175	704	7	28	166	3545	3215	7815	6005	3545	2725
8.15-15 (28x9-15)	225/75-15	7.00-15	•	GS-WT	214	680	8	27	195	3770	3420	8310	6390	3770	2900
8.25-15		5.50-15	•	GS-WT	209	806	8	32	190	4750	4300	10470	8045	4750	3650
8.25-15		6.50-15	•	GS-WT	209	806	8	32	190	4750	4300	10470	8045	4750	3650
250-15	250/70-15	7.00-15	•	GS-WT	216	709	9	28	204	4750	4310	10470	8045	4750	3650
250-15	250/70-15	7.50-15	•	GS-WT	216	709	9	28	204	4750	4310	10470	8045	4750	3650
300-15	315/70-15	8.00-15	•	GS-WT	262	811	10	32	255	5850	5310	12895	9920	5850	4500
355/65-15		9.75-15	•	GS-WT	291	819	11	32	273	7800	6430	17190	13230	7800	6000
9.00-20		6.50-10		GS-WT	231	970	9	38	197	5340	5200	11770	9810	5340	4450
9.00-20		7.00-20		GS-WT	231	970	9	38	197	5340	5200	11770	9810	5340	4450
10.00-20		7.00-20		GS-WT	250	1005	10	40	222	6000	5450	13230	11025	6000	5000
10.00-20		7.50-20		GS-WT	250	1005	10	40	222	6000	5450	13230	11025	6000	5000
10.00-20		7.50-20	•	GS-WT	250	1005	10	40	222	6000	5450	13230	11025	6000	5000
10.00-20		8.00-20		GS-WT	250	1005	10	40	222	6000	5450	13230	11025	6000	5000
12.00-20		7.50-20		GS-WT	284	1084	11	43	251	7500	6810	16535	13780	7500	6250
12.00-20		8.00-20		GS-WT	284	1084	11	43	251	7500	6810	16535	13780	7500	6250
12.00-20		8.50-20		GS-WT	284	1084	11	43	251	7500	6810	16535	13780	7500	6250

LIMITED WARRANTY

All tires manufactured by Global Rubber Industries (Pvt) Ltd. are covered under limited warranty against materials, workmanship and any other manufacturing defects subjected to the usage of these tires under specified conditions. If any tire covered by this warranty is identified as unserviceable tire due to a material / workmanship /any other manufacturing defect, we will either repair the tire or make an allowance on purchase of new tire as per the current price of a new tire by the percentage of original tread worn off at the time of making the claim.

The cost of transportation, service, and sales tax already paid will be borne by the owner of the claimed tire. This limited warranty is made for the exclusive benefit of the tire owner actually using the product. No other warranty of liability, expressed or implied, is applicable to this limited warranty or to our products.

Business today is complex, ambiguous and uncertain – a little like life itself. To help you advance and attain your goals, you need something that is completely the opposite. GRI tires are robustly engineered and relentlessly tested to give you assured performance, so you can get a grip on things that really matter to you. Whatever your ambition, GRI will get you there.

For more information, please contact info@gritires.com

