

SOLUCIONES A PRUEBA DE ROCA

LIUGONG
MÉXICO, CENTROAMÉRICA
Y EL CARIBE

DRESSTA

Model CLG2025A-SC
Capacity @ 500 mm LC 2,500 kg
Power Type Electric
Controller Curtis

CLG2025A-SC

ELECTRIC FOUR WHEEL
CUSHION TIRE FORKLIFTS



LIUGONG



TOUGH WORLD. TOUGH EQUIPMENT.

CLG2025A-SC SPECIFICATIONS >>>

| | | | | | | |
|------------------------------|---------------------------------|----------------------------|--------------------------------------|-------------------------|-----------------|-----------|
| General | Model | 1 | | | CLG2025A-SC | |
| | Power Type | 2 | | | Electric | |
| | Base Capacity | 3 | @ rated load center | kg | 2500 | |
| | Load Center | 4 | | mm | 500 | |
| Weights | Service Weight | 5 | unloaded with minimum weight battery | kg | 4400 | |
| | Axle Load | 6 | loaded, front / rear | kg | 6010/1700 | |
| | | 7 | unloaded, front / rear | kg | 950/2700 | |
| Tires | Tire Type | 8 | | | cushion | |
| | Wheels | 9 | front / rear | | 2/2 | |
| | Wheelbase | 10 | | mm | 1295 | |
| | Tire Size | 11 | front | | 21x7x15 | |
| | | 12 | rear | | 16x5x10.5 | |
| Mast | Tread Width | 13 | front / rear | mm | 890 / 920 | |
| | Max. Fork Height | 14 | with std 2 - stage mast | mm | 3000 | |
| | Freelift | 15 | with std 2 - stage mast | mm | 140 | |
| | Height, Upright Lowered | 16 | with std 2 - stage mast | mm | 2130 | |
| | Height, Upright Extended | 17 | with std 2 - stage mast | mm | 4090 | |
| | Mast Tilt, Fwd / Back | 18 | with std 2 - stage mast | deg | 6° / 8° | |
| | Carriage | 19 | width | mm | 920 | |
| | Fork Spread | 20 | minimum / maximum | mm | 244/904 | |
| | Fork Dimensions | 21 | T x W x L | mm | 40 x 122 x 1070 | |
| | Chassis | Length to Fork Face | 22 | with std 2 - stage mast | mm | 2118 |
| | | Overall Width | 23 | | mm | 1080 |
| Overhead Guard Height | | 24 | | mm | 2235 | |
| Turning Radius | | 25 | minimum outside | mm | 1850 | |
| Fork Overhang | | 26 | with std 2 - stage mast | mm | 425 | |
| Right Angle Stack | | 27 | add load length and clearance | mm | 3425 | |
| Ground Clearance | | 28 | minimum loaded | mm | 75 | |
| | | 29 | center of wheelbase | mm | 100 | |
| Battery Compartment | | 30 | length / width / height | mm | 760/975/575 | |
| Performance | | Travel Speed | 31 | loaded / unloaded | km/h | 18.5/18.5 |
| | Lift Speed | 32 | loaded / unloaded | m/s | 0.40/0.64 | |
| | Lower Speed | 33 | loaded / unloaded | m/s | 0.52/0.5 | |
| | Max. Drawbar Pull | 34 | 5 min. rating | kg | 1450 | |
| | | 35 | 60 min. rating | kg | / | |
| | Max. Gradeability | 36 | 5 min. rating | % | 20 | |
| Systems | Controllers | 37 | drive / hydraulic (make, type) | | AC | |
| | Motors | 38 | drive output (60 min. rating) | kw | 14 | |
| | | 39 | hydraulic output (15 min. rating) | kw | 18 | |
| | Battery | 40 | type | | Lead Acid | |
| | | 41 | voltage | | 48/36 | |
| | | 42 | max. capacity (6 hour rating) | kwh | 715 | |
| | | 43 | weight, minimum / maximum | kg | 1089/1431 | |

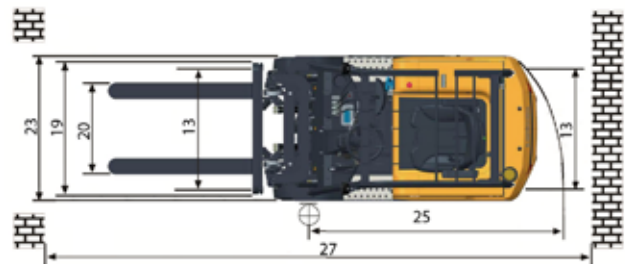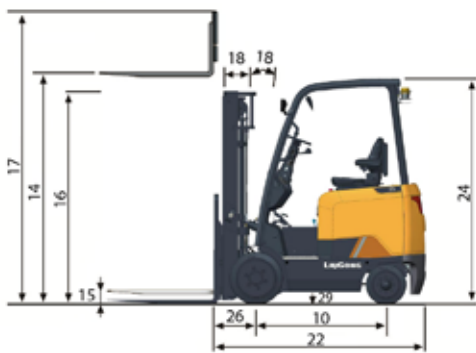

Las especificaciones y diseños están sujetos a cambios sin previo aviso. Las máquinas mostradas pueden incluir equipos estándar y opcionales.